


CEBV

适用于各种高温/高腐蚀/高磨损等极端严苛工况

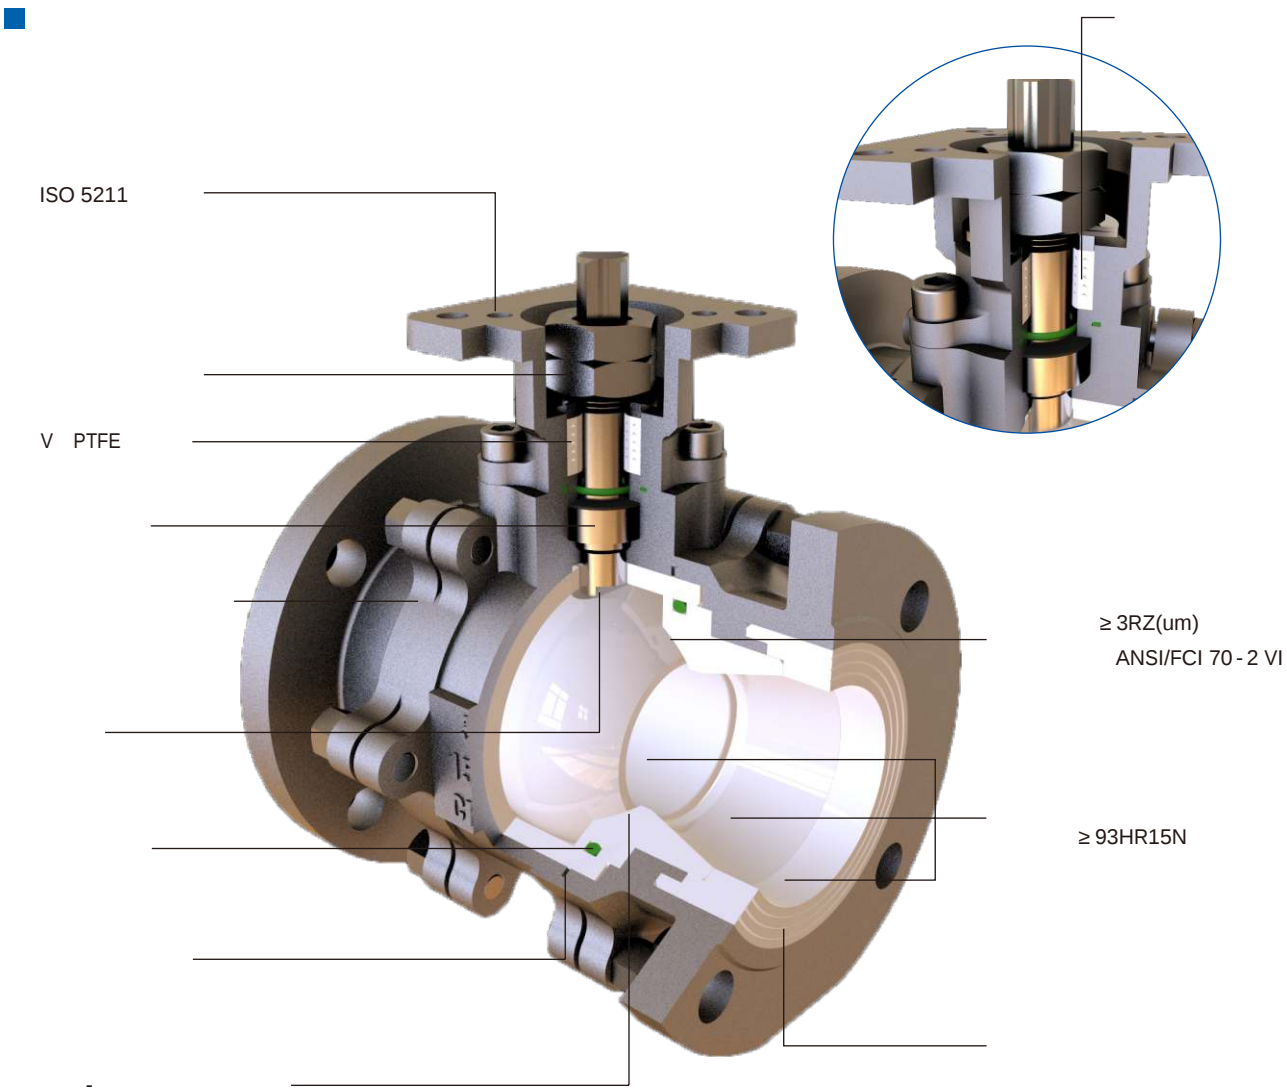

产品类型

压力等级

PN10,PN16; ANSI CL 150

口径范围

DN25~100 / 1"~4"

适用温度

-29 ~ +200

设计规范


ASME B16.34
ASME B16.10, GB/T 12221 - 2005
ASME B16.5, GB/T 9113 - 2010
GB/T 13927 - 2008, JB/T 9092 - 1999, API 598

阀门允许泄漏等级


ANSI/FCI 70-2 Table 1 Class VI

应用工况：

> >
> >
> >
> >
> >
> >

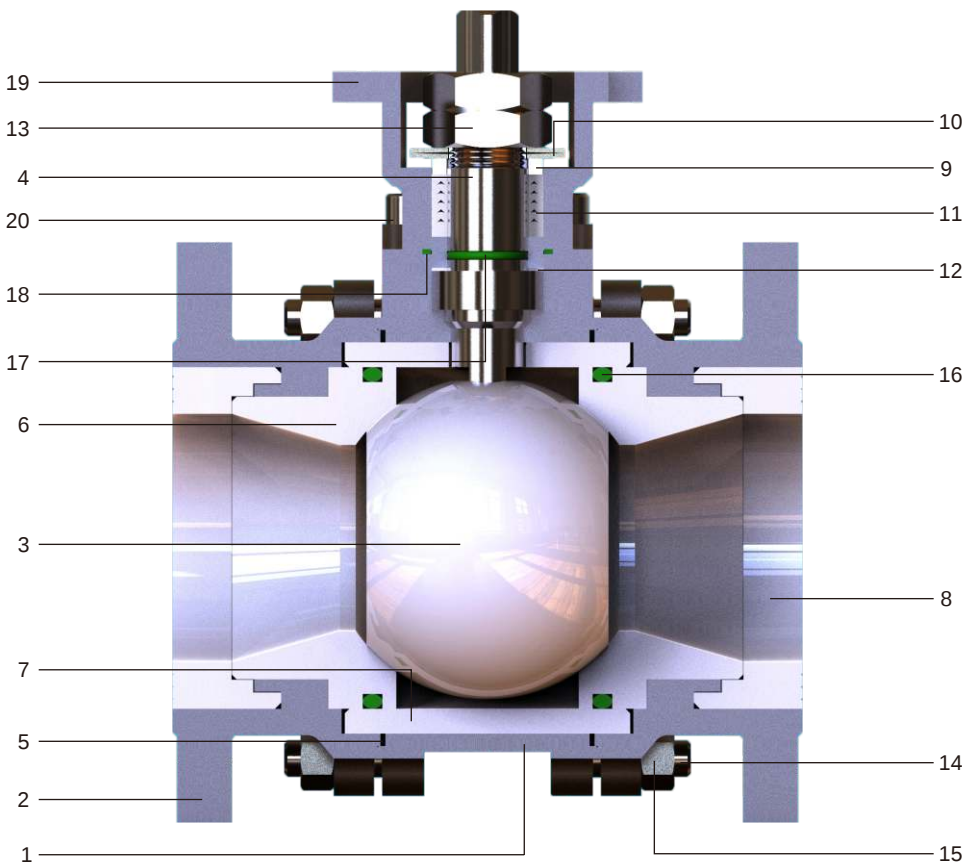

1		A216 WCB/A351 CF8
2		A216 WCB/A351 CF8
3		(ZRO2)
4		F304/17 - 4PH/HC 276
5		PTFE
6		(99% AL2O3)
7		(99% AL2O3)
8		(99% AL2O3)
9		ASTM A276 304
10		SS304
11		PTFE
12		PTFE
13		SS304
14		ASTM A193 B8
15		ASTM A194 8
16	O	VITON
17	O	VITON
18		VITON
19		A216 WCB/A351 CF8
20		ASTM A193 B8

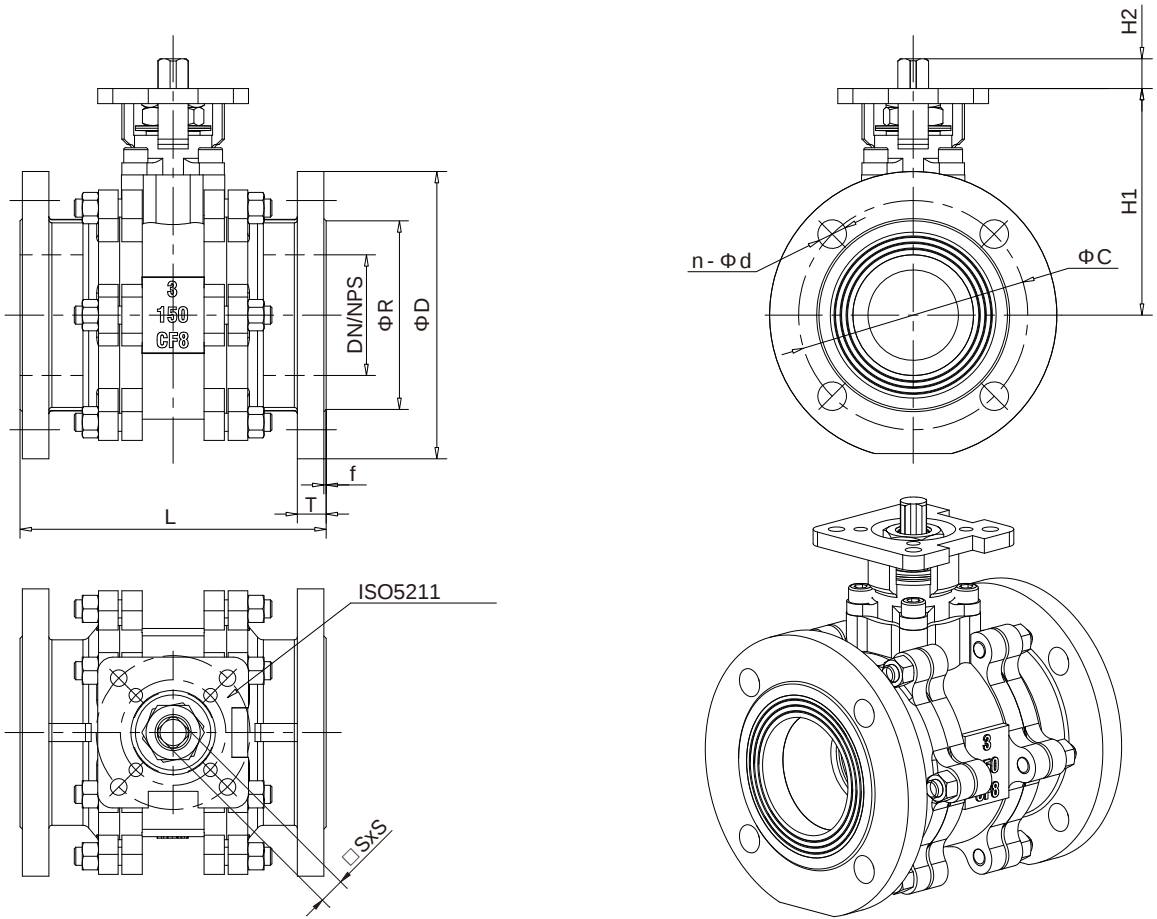

DN	NPS	L	ISO5211	□SxS	H1	H2	ASME B16.5 CL150 RF						GB/T 9113-2010					
							ΦD	ΦC	ΦR	n-Φd	T	f	ΦD	ΦK	ΦA	n-Φd	T	f
25	1"	127	F04 - F05	9x9	64	12	110	79.4	50.8	4 - 16	14	2	115	85	68	4 - 16	18	2
40	1 - 1/2"	165	F05 - F07	11x11	87	14	125	98.4	73.0	4 - 16	16	2	150	110	88	4 - 16	18	2
50	2"	178	F05 - F07	14x14	91	14	150	120.7	92.1	4 - 19	18	2	165	125	102	4 - 19	18	2
65	2 - 1/2"	190	F07 - F10	19x19	140	20	180	139.7	104.8	4 - 19	18	2	185	145	122	8 - 19	20	2
80	3"	203	F07 - F10	19x19	153	20	190	152.4	127.0	4 - 19	20	2	200	160	138	8 - 19	20	2
100	4"	229	F10 - F12	22x22	175	24	230	190.5	157.2	8 - 19	24	2	220	180	158	8 - 19	24	2

